

# VOC Emissions Test report

Abriso

Gijzelbrechtegemstr. 8-10  
8570 Anzegem  
Belgium

Eurofins Product Testing A/S  
Smedeskovvej 38  
8464 Galten  
Denmark

[voc@eurofins.com](mailto:voc@eurofins.com)  
[www.eurofins.com/voc-testing](http://www.eurofins.com/voc-testing)


Date  
13/01/2012  
Your ref.  
-

## 1. Sample Information

Sample identification	AIRFLEX / SUPERPOSE
Product type	Bubble foil
Batch no.	VK 1119379
Production date	16/9/11
Date when sample was received	03/10/2011
Testing (start - end)	30/11/2011 - 28/12/2011

## 2. Resulting VOC Emissions Class Label

This recommendation is based on French regulation as published on 25 March 2011 (décret DEVL1101903D) and on 13 May 2011 (arrêté DEVL1104875A). For details please see [www.eurofins.com/france-voc](http://www.eurofins.com/france-voc)

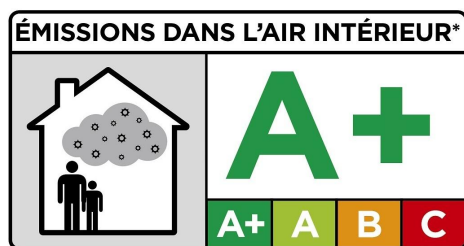

\*Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions).

The results are only valid for the tested sample(s).

This report may only be copied or reprinted in its entity, parts of it only with a written acceptance by Eurofins.

### 3. Test Method

Method	Principle	Parameter	Detection limit	Uncertainty	
ISO 16000 parts -3, -6, -9, -11 Internal method numbers: 9810, 9811, 9812, 2808, 8400	GC/MS HPLC/UV	VOC Volatile aldehydes	5 µg/m <sup>3</sup> 5 µg/m <sup>3</sup>	22% (RSD) Um = 2 x RSD = 45 %	
<b>Test chamber parameter</b>					
Chamber volume (L):	119	Temperature (C):	23	Relative humidity (%):	50
Air change rate (per hour):	0.5	Loading ratio(m <sup>2</sup> /m <sup>3</sup> )	1		
<b>Test condition: Sample stayed in test chamber during the whole 28 days testing period.</b>					
<b>Sample preparation</b>					
-					

## 4. Results

AIRFLEX - SUPERPOSE	Concentration after 28 days $\mu\text{g}/\text{m}^3$	C	B	A	A+
TVOC	<2	>2000	<2000	<1500	<1000
Formaldehyde	<3	>120	<120	<60	<10
Acetaldehyde	<2	>400	<400	<300	<200
Toluene	<2	>600	<600	<450	<300
Tetrachloroethylene	<2	>500	<500	<350	<250
Ethylbenzene	<2	>1500	<1500	<1000	<750
Xylene	<2	>400	<400	<300	<200
Styrene	<2	>500	<500	<350	<250
2-Butoxyethanol	<2	>2000	<2000	<1500	<1000
Trimethylbenzene	<2	>2000	<2000	<1500	<1000
1,4-Dichlorobenzene	<2	>120	<120	<90	<60

- < Means less than  
> Means higher than



Thomas Neuhaus  
Head of product emission test centre



Søren Ryom Villadsen  
Analytical Service Manager